



**Model 500T7z5G18,
M1 through M13
500 Watts CW
7.5GHz–18GHz**

The Model 500T7z5G18 is a self contained, forced air cooled, broadband traveling wave tube (TWT) microwave amplifier designed for applications where instantaneous bandwidth, reduced harmonics and high gain are required. A reliable TWT subsystem provides a conservative 500 watts minimum at the amplifier output connector. Stated power specifications are at fundamental frequency.


The amplifier's front panel digital display shows forward and reflected output plus extensive system status information accessed through a series of menus via soft keys. Status indicators include power on, warm-up, standby, operate, faults, excess reflected power warning and remote. Standard features include a built-in IEEE-488 (GPIB) interface, 0 dBm input, VSWR protection, gain control, RF output sample port, plus monitoring of TWT helix current, cathode voltage, collector voltage, heater current, heater voltage, baseplate temperature and cabinet temperature. Modular design of the power supply and RF components allow for easy access and repair. Use of a switching mode power supply results in significant weight reduction.

The rated power is developed by efficiently power combining the outputs from two 300 watts (nominal) microwave tubes that are factory matched in gain and phase to offer moderate harmonic levels without added filters.

Housed in a stylish contemporary cabinet, this unit is designed for benchtop use, but can be removed from cabinet for rack mounting. The Model 500T7z5G18 provides readily available RF power for a variety of applications in Test and Measurement, (including EMC RF susceptibility testing), Industrial and University Research and Development, and Service applications.

See Model Configuration for package alternatives, alternate primary power, and special features. The export classification for this equipment is 3A001. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

MODEL 500T7z5G18 TYPICAL POWER OUTPUT

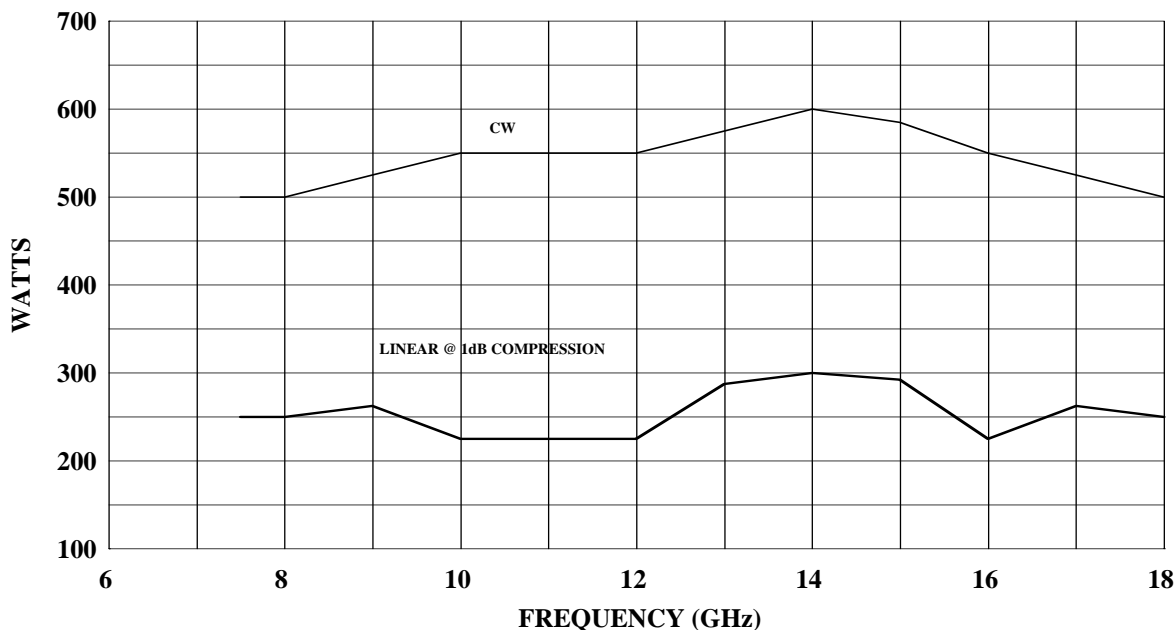

SPECIFICATIONS, MODEL 500T7z5G18

POWER (fundamental), CW, @ OUTPUT CONNECTOR

Nominal	550 watts
Minimum	500 watts
Linear @ 1 dB Compression	125 watts minimum

FLATNESS..... ± 11 dB maximum, equalized for ± 3 dB maximum at rated power

FREQUENCY RESPONSE..... 7.5 - 18 GHz instantaneously

INPUT FOR RATED OUTPUT..... 1.0 milliwatt maximum

GAIN (at maximum setting)..... 57 dB minimum

GAIN ADJUSTMENT (continuous range)..... 35 dB minimum

INPUT IMPEDANCE..... 50 ohms, VSWR 2.0:1 maximum

OUTPUT IMPEDANCE..... 50 ohms, VSWR 2.5:1 typical

MISMATCH TOLERANCE..... Output power foldback protection at reflected power exceeding 100 watts. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. May oscillate with unshielded open due to coupling to input. Should not be tested with connector off.

MODULATION CAPABILITY..... Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal. AM peak envelope power limited to specified power.

NOISE POWER DENSITY..... Minus 70 dBm/Hz (maximum), Minus 72 dBm/Hz (typical)

HARMONIC DISTORTION..... Minus 20 dBc maximum, Minus 22 dBc typical

PRIMARY POWER..... 208 VAC $\pm 10\%$ three phase 50/60 Hz 4 KVA maximum

CONNECTORS

RF input	Type N precision female on rear panel
RF output	Type WRD-750D24 waveguide flange on rear panel
RF output sample port	Type N precision female on rear panel
GPIB.....	IEEE - 488 (f) on rear panel
Interlock	DB-15 (f) on rear panel

COOLING..... Forced air (self contained fans), air entry and exit in rear.

SIZE (W x H x D)..... See Model Configurations

WEIGHT (approximate)..... 91 kg, 200 lb

EXPORT CLASSIFICATION..... 3A001. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

MODEL CONFIGURATIONS Model 500T7z5G18

- E** **Package Alternatives.** May select an alternative from the following [E1C or (E1C and E2S) and/or E3H]:
- E1C** **Cabinet:** Without outer enclosure. Subtract approximately 18 kg, 40 lbs, for removal of outer enclosure.
- E2S** **Slides:** slides installed on each sub-assembly, add approximately 5 kg, 10 lbs.
- E3H** **Handles:** Front pull handles installed on each sub-assembly.
- P** **Primary Power.** May select alternate primary power from the following [P1]
- P1** 190-260 VAC single phase 50/60 Hz, 4 KVA maximum
- S** **Special Features:** May select a special feature (extra cost) [S1R and/or S2V]
- S1R** **Reflected sample port on rear panel,** type N precision female connector. Forward and reflected sample port calibration data supplied on disk in Excel format at 51 points, evenly spaced over the specified frequency range.
- S2R** **Reflected sample port on front panel,** type N precision female connector. RF input connector moved to front panel.
- S2V** **Video pulse capability,** to offer blanking capability to use for noise quieting or primary power reduction.
- VIDEO PULSE CAPABILITY**
- Pulse Width: up to CW
 - Pulse Rate (PRF): up to 100 kHz
 - RF Rise and Fall: 30 ns max (10% to 90%)
 - Delay: 300 ns max from pulse input to RF90%
 - Pulse width distortion: ± 30 ns max (50% points of output pulse width compared to 50% points of input pulse width)
- NOISE POWER DENSITY**
- (pulse off): Minus 140 dBm/Hz (typical)
- CONNECTOR**
- Video: BNC-female on rear panel

Model Number	E	P	S	Features	Size (WxHxD)
500T7z5G18	Base model	-	-		50.3 x 40.6 x 68.6 cm, 19.8 x 16 x 27 in
M1	E1C	-	-		Two subassemblies, 3U and 5U, total size: 48.3 x 35.6 x 63.5 cm, 19 x 14 x 25 in
M2	E3H	-	-		50.3 x 40.6 x 68.6 cm, 19.8 x 16 x 27 in
M3	E1C & E3H	-	-		Two subassemblies, 3U and 5U, total size: 48.3 x 35.6 x 63.5 cm, 19 x 14 x 25 in
M4	E1C & E2S	-	-		Two subassemblies, 3U and 5U, total size: 48.3 x 35.6 x 63.5 cm, 19 x 14 x 25 in
M5	E1C & E2S & E3H	-	-		Two subassemblies, 3U and 5U, total size: 48.3 x 35.6 x 63.5 cm, 19 x 14 x 25 in
M6	-	-	S1R		50.3 x 40.6 x 68.6 cm, 19.8 x 16 x 27 in
M7	E1C	-	S1R		Two subassemblies, 3U and 5U, total size: 48.3 x 35.6 x 63.5 cm, 19 x 14 x 25 in
M8	E1C & E2S & E3H	-	S1R		Two subassemblies, 3U and 5U, total size: 48.3 x 35.6 x 63.5 cm, 19 x 14 x 25 in
M9	-	P1	-		50.3 x 40.6 x 81.3 cm, 19.8 x 16 x 32 in
M10	E1C	P1	-		Two subassemblies, 3U and 5U, total size: 48.3 x 35.6 x 76.2 cm, 19 x 14 x 30 in
M11	E1C & E2S & E3H	P1	-		Two subassemblies, 3U and 5U, total size: 48.3 x 35.6 x 76.2 cm, 19 x 14 x 30 in
M12	-	-	S2V		50.3 x 40.6 x 68.6 cm, 19.8 x 16 x 27 in
M13	-	-	S2R		50.3 x 40.6 x 68.6 cm, 19.8 x 16 x 27 in

Model number example: Model 500T7z5G18M2 would have option E3H front handles installed.