

ACS 500N2.3

SINGLE PHASE AC/DC VOLTAGE SOURCE 2 KVA, GALVANICALLY ISOLATED



FOR TESTS ACCORDING TO ...

- › EN 61000-3-2
- › EN 61000-3-3
- › EN 61000-4-16
- › IEC 60533
- › IEC 61000-3-2
- › IEC 61000-3-3
- › IEC 61000-4-16
- › IEC 61326
- › IEC 61543
- › IEC 61850-3

ACS 500N2.3 is a single phase AC/DC source, specifically designed for test applications as per IEC 61000-4-16 in combination with the CWS 500N4 common-mode disturbance simulator. It also meets the requirements for IEC/EN 61000-3-2 and IEC/EN 61000-3-3. The galvanically isolated input guarantees the test signal to be separated from the mains supply voltage.

By means of the ACS 500N2.3 the capabilities of the CWS 500N4 can be expanded for tests with DC, 16.66Hz as well as 50Hz and 60Hz independent from the actual mains supply frequency delivering a max. output voltage of 330V AC/DC.

HIGHLIGHTS

- › **Frequency (fund.) 10Hz .. 80Hz and DC**
- › **Very low distortion (THD)**
- › **Very high voltage stability**
- › **Output power max. 2,000VA**
- › **Output voltage max. 330V AC/DC**
- › **High overcurrent capability**
- › **Inrush current capability**

APPLICATION AREAS

-  INDUSTRY
-  RESIDENTIAL

TECHNICAL DETAILS

OUTPUT

Voltage range	0V to 330V AC/DC
Voltage resolution	0.025% (12 bit)
Output frequency	DC, 10Hz to 80Hz
Frequency resolution	0.02Hz
Frequency accuracy, stability	100ppm
Output power	2,000VA
Output connector	Safety laboratory connectors
Output current, 50Hz	Continuous: 7.7A maximum RMS (max. 3s): 15.1A Repetitive peak: 60A
Output current, 60Hz	Continuous: 8.0A maximum RMS (max. 3s): 15.4A Repetitive peak: 60A

REGULATION

Voltage Sense	Internal or external, 4 wires
Total harmonic distortion	Less than 0.1%
Output voltage stability	Better than 0.1%
Output voltage accuracy	Better than 0.5%
Max. compensatable drop on wires	5% f.s.
Protection	Overcurrent Overtemperature Overvoltage Undervoltage

INPUT (VIA ISOLATION TRANSFORMER)

Supply voltage	230V (L,N,PE)
Input current	16A
Line frequency	45Hz to 65Hz
Fuse	16A internal
Connector	16A

AMBIENT CONDITIONS

Temperature	0°C to 35°C
Rel. humidity	80%, non condensing


CONTROL

Interface	RS 232 9-pin SubD for control via CWS 500N4
-----------	---

DIMENSIONS

Housing	19", 6HU
Weight	23kg
Size	287mm x 449mm x 500mm

COMPETENCE WHEREVER YOU ARE

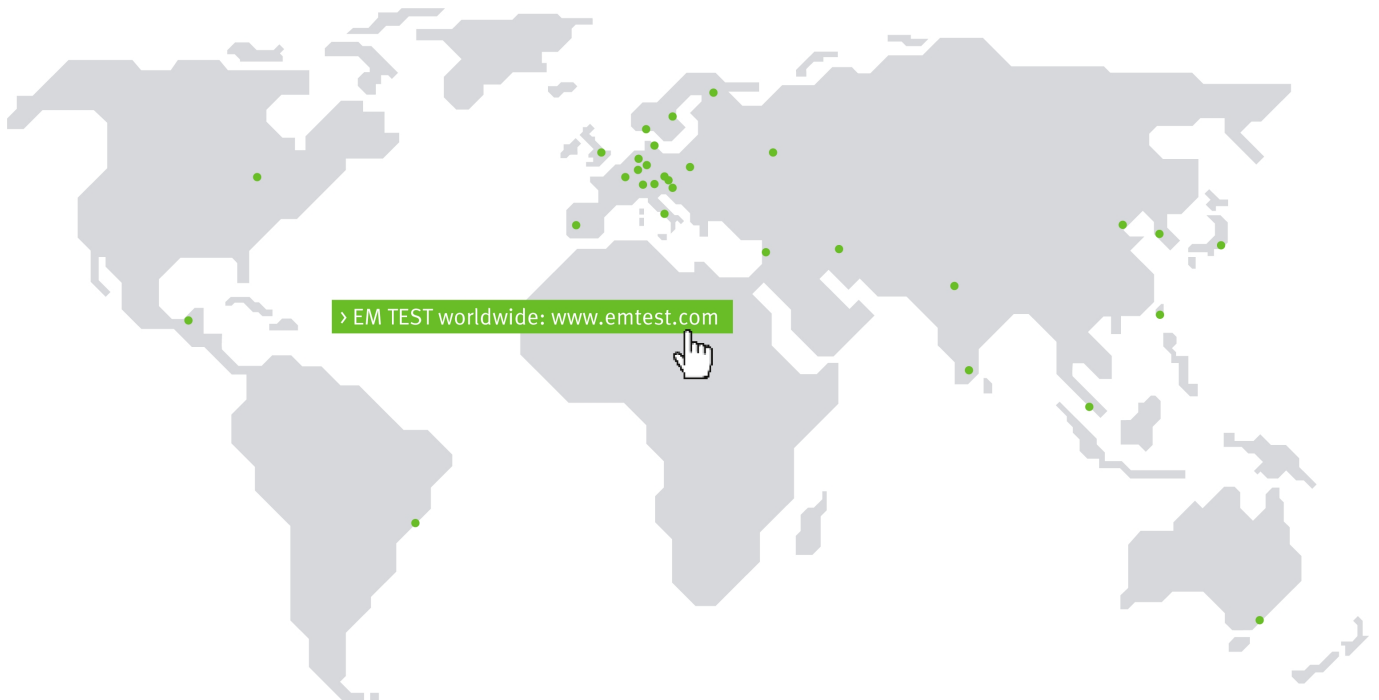

CONTACT EM TEST DIRECTLY

Switzerland

EM TEST (Switzerland) GmbH > Sternenhofstraße 15 > 4153 Reinach > Switzerland
 Phone +41 (0)61/7179191 > Fax +41 (0)61/7179199
 Internet: www.emtest.ch > E-mail: sales.emtest@ametek.com

Germany

EM TEST GmbH > Lünener Straße 211 > 59174 Kamen > Deutschland
 Phone +49 (0)2307/26070-0 > Fax +49 (0)2307/17050
 Internet: www.emtest.com > E-mail: info.emtest@ametek.de

France

EM TEST FRANCE > Le Trident - Parc des Collines > Immeuble B1 - Etage 3 > 36, rue Paul Cézanne > 68200 Mulhouse > France
 Phone +33 (0)389 31 23 50 > Fax +33 (0)389 31 23 55
 Internet: www.emtest.fr > E-mail: info@emtest.fr

Poland

EM TEST Polska > ul. Ogrodowa 31/35, 00-893 Warszawa > Polska
 Phone +48 (0)518 64 35 12
 Internet: www.emtest.com/pl > E-mail: info_polska.emtest@ametek.de

USA / Canada

EM TEST USA > 9250 Brown Deer Road > San Diego > CA 92121
 Phone +1 (858) 699 1685 > Fax +1 (858) 458 0267
 Internet: www.emtest.com > E-mail: sales.emtest@ametek.com

P.R. China

E & S Test Technology Limited > Rm 913, Leftbank > No. 68 Bei Si Huan Xi Lu > Haidian District > Beijing 100080 > P.R. China
 Phone +86 (0)10 82 67 60 27 > Fax +86 (0)10 82 67 62 38
 Internet: www.emtest.com > E-mail: info@emtest.com.cn

Republic of Korea

EM TEST Korea Limited > #405 > WooYeon Plaza > #986-8 > YoungDeok-dong > Giheung-gu > Yongin-si > Gyeonggi-do > Korea
 Phone +82 (31) 216 8616 > Fax +82 (31) 216 8616
 Internet: www.emtest.co.kr > E-mail: sales@emtest.co.kr

Information about scope of delivery, visual design and technical data correspond with the state of development at time of release. Technical data subject to change without further notice.