


Digital Phosphor Oscilloscopes


► TDS700D

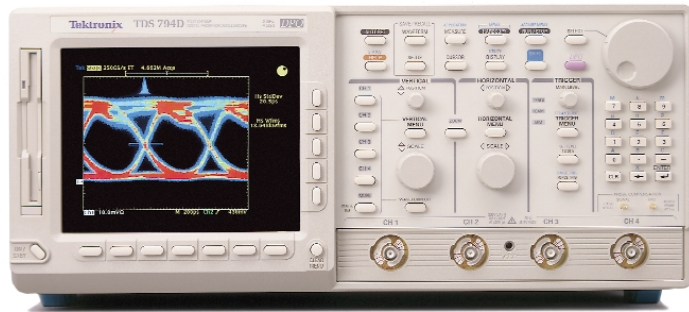

The TDS700D Family of Digital Phosphor Oscilloscopes

The TDS700D oscilloscopes are the first in the TDS family of Digital Phosphor Oscilloscopes (DPOs) designed to keep pace with current and evolving needs in advanced electronic design and debug. DPOs deliver a new level of insight that makes dealing with complex signals elementary – a new level of insight that must be seen to be believed. DPOs capture, store, display and analyze, in real-time, three dimensions of signal information: amplitude, time and distribution of amplitude over time. The benefit of this new third dimension of information is an interpretation of the signal dynamics, including instantaneous changes and the frequency of occurrence displayed in the form of quantitative intensity information.

Easy to Learn and Easy to Use
Extensive user interface design has made the TDS family of products truly intuitive to operate. Each family member shares a familiar front panel

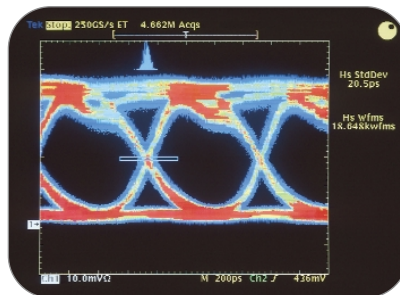

layout with dedicated vertical, horizontal, and trigger controls. A graphical user interface with over 200 icons helps facilitate understanding and use of the advanced features. A color monitor helps rapidly distinguish between multiple waveforms and measurements. Online help provides a convenient built-in reference manual.

► Features & Benefits


- 2 GHz, 1 GHz and 500 MHz Bandwidths
- Sample Rates to 4 GS/s
- Captures and Displays up to 200,000 Waveforms per Second
- 2 or 4 Channels
- 1% Vertical Accuracy
- 8-Bit Vertical Resolution, Over 11-Bits with Averaging and Over 13-Bits with Hi-res
- 1 ns Peak Detect
- 1 mV/div to 10 V/div Sensitivity
- Up to 1.7 GHz Differential Measurements
- Channel Deskew
- Record Lengths to 8 M Points
- Floppy Disk Storage
- Imega Zip and Zip Plus Drive Compatible
- Advanced Triggering
- 29 Automatic Measurements and Measurement Statistics
- FFT and Advanced Math
- Histograms
- Histogram Statistics
- Limit Test
- FastFrame™ Time Stamp
- Communication Signal Analysis Including Mask Testing and SONET/SDH and Fibre Channel Optical Reference Receivers
- Full GPIB Programmability
- 3 Year Warranty
- CE Marking

► Applications

- Communication Compliance Testing
- Digital Design and Debugging
- Jitter and Timing Analysis
- Fast Edge Characterization
- Video Design and Debug
- Disk Drive Measurements
- Power Measurements

Digital Phosphor Oscilloscopes


► TDS700D

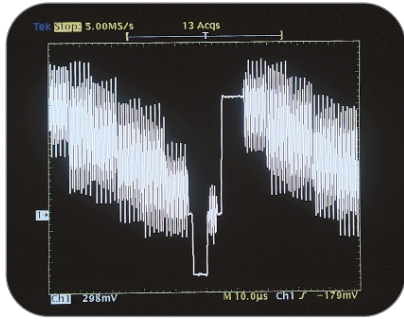

► A traditional DSO is unable to display the details and dynamic changes of this composite video waveform.



► The same composite video signal, captured with a Digital Phosphor Oscilloscope, shows all the details of this complex waveform, in real time.

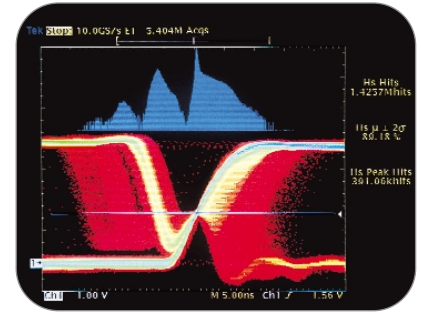

► The horizontal histogram of the selected region of the waveform shows the character of a metastable flip-flop output.

High Fidelity Signal Acquisition

The high waveform capture rate of the TDS700D DPO, together with its high bandwidth and sample rate, delivers instantaneous signal feedback to show the true signals that other scopes may be missing. The DPO acquisition acquires over 1,000 times more data than traditional DSOs, allowing the capture of complex signals, reducing debugging times from hours to seconds.

Channels can be transparently combined to achieve higher sample rates and longer record lengths. The record length can be optionally increased to 8 M points, providing a high-resolution representation of the signal over a long period of time.

All of the TDS products provide wide dynamic range, flat response, fast overdrive recovery, calibrated DC offset, 1 mV/div sensitivity (10 mV maximum sensitivity on TDS794D), 1 ns peak detect and internal calibration.

Powerful and Flexible Triggering

In addition to basic triggering such as edge and pulse-width, these Digital Phosphor Oscilloscopes have several trigger modes tailored for specific design and debug applications. Logic and pulse triggers, including setup/hold, glitch, slew rate and timeout triggers, capture hard-to-catch digital design problems. The optional video trigger provides line and field selection for NTSC, PAL and HDTV standards. The optional communications trigger capability addresses needs to acquire a wide variety of AMI, CMI, NRZ and Ethernet communication signals.

Advanced Performance Features

Digital Phosphor Oscilloscope operation provides three dimensions of signal information including amplitude, time and the distribution of amplitude over time; in the form of quantitative intensity information. The resulting information-rich display enables the user's eye to integrate the subtle patterns and variations of actual signal behavior.

Color-grading

displays historical information that has been acquired over time. This is especially powerful when used in DPO operation, where the colors show relatively how often random events occur.

Automatic Measurements eliminate the need for manually measuring the waveform against the graticule or with cursors. Measurement gating, (gating not available for DPO operation) allows the user to select a specific part of the live waveform for measurement. Measurement statistics (min, max, mean and standard deviation), give additional information about the variations in the measurements over time (for example, worst case excursions), increasing the confidence in the quality of the measurements.

Waveform Histograms allow the examination of the statistical nature of the signal. Horizontal histograms, which are useful for evaluating signal jitter, sample the waveform within a specified region, sort the values into time bins and plot the accumulated bin values versus time. Vertical histograms, which are useful for evaluating signal

noise, sample the waveform within a specified region, sort the values into amplitude bins and plot the accumulated bin values versus amplitude.

For histograms of DPO acquisitions (both live and stored), the specified region can be repositioned and will update to reflect the underlying 3 dimensional data base (32 bits in shallow mode, 64 bits in deep mode).

Communication Mask Testing (available as an option) allows mask compliance testing of a wide variety of communication signals to industry standards. Specialized measurement accessories, unique trigger modes, built-in optical reference receiver filters, mask autoselect and mask violation counting make these measurements easily and repeatedly.

Applications Software Packages

These Java™ based applications packages reduce the cost, time and complexity common to many application-specific test procedures. These application-specific capabilities are easily installed via floppy disks and require a hard disk drive (Option HD or Option 2M).

TDSDDM1 provides users with industry-standard measurements such as Track Average Amplitude (TAA), 50% Pulse Width (PW⁵⁰), Non-Linear Transition Shift (NLTS) and Signal-to-Noise Ratio (SNR). This capability gives disk drive designers direct measurements in industry-standard terminology.

TDSPWR1 gives designers interested in power consumption applications the ability to automatically calculate True Power, Apparent Power, Power Factor, Instantaneous Power and Energy to eliminate manual calculations.

TDSJIT1V2 performs a suite of jitter measurements with unprecedented accuracy on single-shot waveforms. Jitter information can be displayed as statistics, histograms, time trends or jitter spectrums.

This software makes timing measurements by providing statistics on specific, fully time-correlated data and clock edges. It also performs automated AC timing measurements on all parameters in single-shot acquisitions.

TDSCM1 performs a suite of automated eye diagram measurements on SONET/SDH and Fibre Channel standards. These measurements include eye height, eye width and quality factor.

TDSCPM1 performs automated parametric measurements of pulse amplitude, spectral power and pulse symmetry to standards requirements.

Standards include ANSI T1.102 and ITU-T G.703.

Java™ is a registered trademark of Sun Microsystems.

Complementary Measurement Accessories


Tektronix provides a wide range of measurement accessories optimized for the TDS family.

These accessories are designed to operate via the TEKPROBE® interface, which provides power and automatic scaling, to complete the DPO measurement solutions.

Active Probes such as the P6249 and P6245 active probes were designed specifically for the DPO products. For example, the P6249 (4 GHz probe only) is capable of achieving the full 2 GHz bandwidth on a TDS794D, while providing low loading.

The P6339A Buffered Passive Probe is designed to provide 500 MHz bandwidth at the probe tip for the TDS794D.

Optical-to-electrical Converters (P6701B, P6703B) allow convenient analysis of optical transmission signals with the oscilloscope. Both short- and long-wavelength optical converters are compatible with the industry-standard wavelengths for SONET/SDH and Fibre Channel.

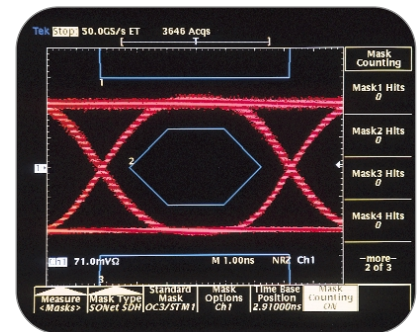

▶ A SONET/SDH (OC-3/STM-1) signal is compared with the standard mask, showing a compliant waveform.

High-bandwidth Differential Probes (P6248, P6247) enable high bandwidth (up to 1.7 GHz) differential measurements while maintaining high common-mode rejection.

Current Probes such as the TCP202 and **High-Voltage Differential Probes** such as the P5205 and P5210 allow safe, high-power measurements. Direct Probe Readouts use information from the probes to display measurements in units of Amps, Volts and Watts.

Sophisticated Documentation Save screen displays in a number of standard desktop publishing formats to the internal 3.5 in. MS DOS-compatible floppy disk drive. Transfer the disk to a PC for import into word processing applications. Make hardcopies directly to monochrome or color printers and plotters connected to the computer network (LAN), GPIB, RS-232 or Centronics ports, or acquire waveforms, screen displays and scope settings using Tektronix **WaveStar™** software running on a PC interfaced to the GPIB port.

Digital Phosphor Oscilloscopes

► TDS700D

► Characteristics

► TDS700D Series Electrical Characteristics

	TDS794D	TDS784D	TDS754D	TDS724D
Bandwidth	2 GHz* ⁵	1 GHz* ¹	500 MHz* ²	500 MHz* ²
# Channels	4	4	4	2 + 2 aux.
# Samplers	4	4	4	2
Max Real-time Sample Rate				
1 Channel	4 GS/s	4 GS/s	2 GS/s	2 GS/s
2 Channels	2 GS/s	2 GS/s	2 GS/s	1 GS/s
3-4 Channels	1 GS/s	1 GS/s	1 GS/s	NA
Equivalent-time Sample Rate	250 GS/s max.	250 GS/s max.	100 GS/s max.	100 GS/s max.
Maximum Record Length				
1 Channel	50 K (Opt. 1M: 500 K, Opt. 2M: 8 M)	50 K (Opt. 1M: 500 K, Opt. 2M: 8 M)	50 K (Opt. 1M: 500 K, Opt. 2M: 8 M)	50 K (Opt. 1M: 250 K, Opt. 2M: 4 M)
2 Channels	50 K (Opt. 1M: 250 K, Opt. 2M: 4 M)	50 K (Opt. 1M: 250 K, Opt. 2M: 4 M)	50 K (Opt. 1M: 250 K, Opt. 2M: 4 M)	50 K (Opt. 1M: 130 K, Opt. 2M: 2 M)
3-4 Channels	50 K (Opt. 1M: 130 K, Opt. 2M: 2 M)	50 K (Opt. 1M: 130 K, Opt. 2M: 2 M)	50 K (Opt. 1M: 130 K, Opt. 2M: 2 M)	NA
Max Sample Rate Window* ³	2 ms	2 ms	4 ms	4 ms
Display	NuColor™ Display	NuColor™ Display	NuColor™ Display	NuColor™ Display

*¹In 50 Ω mode: 5 mV/div: 750 MHz, 2 mV/div: 600 MHz, 1 mV/div: 500 MHz. Reduce the upper bandwidth frequencies by 5 MHz for each degree C above 30°C.

*²In 50 Ω mode: 1 mV/div: 450 MHz. Reduce the upper bandwidth frequencies by 2.5 MHz for each degree C above 30°C.

*³Single-channel operating at full sample rate and maximum record length (Opt. 2M).

*⁴≥10 mV/div in 50 Ω mode.

*⁵Reduce the upper bandwidth frequency by 20 MHz for each degree C above 30°C.

► TDS700D Series Timebase System

	TDS794D	TDS784D	TDS754D/TDS724D
Time Bases	Main, delayed	Main, delayed	Main, delayed
Time Base Range	200 ps to 10 s/div	200 ps to 10 s/div	500 ps to 10 s/div
Time Base Accuracy	±25 ppm (over any interval ≥1 ms)	±25 ppm (over any interval ≥1 ms)	±25 ppm (over any interval ≥1 ms)
Delta Time Measurement Accuracy	±(0.15/sample rate) + (25 ppm x [reading])	±(0.15/sample rate) + (25 ppm x [reading])	±(0.15/sample rate) + (25 ppm x [reading])
Trigger Jitter	7 ps (typical)	7 ps (typical)	8 ps (typical)
Pre-trigger Position	0% to 100% of any record	0% to 100% of any record	0% to 100% of any record
Delay Between Channels	≤50 ps (any 2 channels with equal V/div and coupling)	≤50 ps (any 2 channels with equal V/div and coupling)	≤50 ps (any 2 channels with equal V/div and coupling)

▶ TDS700D Series Vertical System

	TDS794D	TDS784D	TDS754D	TDS724D
Sensitivity	10 mV/div to 1 V/div (50 Ω mode)	1 mV/div to 10 V/div (1 MΩ mode), 1 mV/div to 1 V/div (50 Ω mode)	1 mV/div to 10 V/div (1 MΩ mode), 1 mV/div to 1 V/div (50 Ω mode)	1 mV/div to 10 V/div (1 MΩ mode), 1 mV/div to 1 V/div (50 Ω mode)
DC Gain Accuracy	±1.0% (0.7% typical)	±1.0% (±0.7% typical)	±1.0% (±0.7% typical)	±1.0% (±0.7% typical)
Effective Bits (typical)	5.0 (2 GHz @ 4 GS/s), 9.7 with Hi-res (1 MHz @ 10 MS/s)	5.5 (1 GHz @ 4 GS/s), 9.7 with Hi-res (1 MHz @ 10 MS/s)	6.8 (500 MHz @ 2 GS/s), 9.7 with Hi-res (1 MHz @ 10 MS/s)	6.8 (490 MHz @ 2 GS/s), 9.7 with Hi-res (1 MHz @ 10 MS/s)
Vertical Resolution	8-Bits (256 levels on 10.25 divisions), >11-Bits with averaging, >13-Bits typical with Hi-res (TDS794D, TDS784D), >12-Bits typical with Hi-res (TDS754D, TDS724D)			
Position Range	±5 divisions	±5 divisions	±5 divisions	±5 divisions
Offset Range	±1 V from 1 mV to 100 mV/div, ±10 V from 101 mV to 1 V/div, ±100 V from 1.01 V to 10 V/div (TDS784D, TDS754D, TDS724D) ±0.5 V from 10 mV to 50 mV/div, ±0.25 V from 50.5 mV to 99.5 mV/div, ±5 V from 100 mV to 500 mV/div, ±2.5 V from 505 mV to 1 V/div (TDS794D)			
Analog Bandwidth Selections	Full only	20 MHz, 250 MHz, full	20 MHz, 250 MHz, full	20 MHz, 250 MHz, full
Input Coupling	DC, GND	AC, DC, GND	AC, DC, GND	AC, DC, GND
Input Impedance Selections	1 MΩ in parallel with 10 pF, or 50 Ω (AC and DC coupling) (TDS784D, TDS754D, TDS724D) 50 Ω only (DC coupling only) (TDS794D only)			
AC-coupled Low Frequency Limit	N/A	≤10 Hz when AC 1 MΩ coupled. ≤200 kHz when AC 50 Ω coupled.	≤10 Hz when AC 1 MΩ coupled. ≤200 kHz when AC 50 Ω coupled.	≤10 Hz when AC 1 MΩ coupled. ≤200 kHz when AC 50 Ω coupled.
Channel Isolation	>100:1 at 100 MHz and >30:1 at the rated bandwidth		>100:1 at 100 MHz and >30:1 at the rated bandwidth	
Max. Input Voltage	5 V _{RMS} , with peaks ≤± 20 Volts	300 V CAT II ±400 V (peak). Derate at 20 dB/decade above 1 MHz. 1 MΩ or GND coupled.	300 V CAT II ±400 V (peak). Derate at 20 dB/decade above 1 MHz. 1 MΩ or GND coupled.	300 V CAT II ±400 V (peak). Derate at 20 dB/decade above 1 MHz. 1 MΩ or GND coupled.

Acquisition Modes

DPO – Captures and displays complex waveforms, random events and subtle patterns in actual signal behavior. By acquiring up to 100 M points/sec (TDS794D, TDS784D, TDS754D (50 M points/sec; TDS724D) DPOs are able to provide 3 dimensions of signal information, in real-time; amplitude, time, and the distribution of amplitude over time. The DPX™ Waveform Imaging Processor automatically selects record lengths between 500 and 500,000 points and sample rate up to 1 GS/s, based on horizontal time base setting, to optimize displayed sample density.

Peak Detect – High frequency and random glitch capture. Captures glitches of 1 ns using acquisition hardware at all real-time sampling rates.

Sample – Sample data only.

Envelope – Max/min values acquired over one or more acquisitions.

Average – Waveform data from 2 to 10,000 (selectable) is averaged.

Hi-res – Vertical resolution improvement and noise reduction on low-frequency signal (e.g., 12-Bits typical).

FastFrame™ Time Stamp – Acquisition memory size segmentable with trigger rate up to 80,000 per second from 50 to 5,000 points per frame (independent of the number of channels).

Single Sequence – Use RUN/STOP button to capture a single triggered acquisition at a time, which may be automatically saved to NVRAM with AutoSave.

Trigger System

Triggers – Main and delayed.

Main Trigger Modes – Auto, Normal, Single.

Delayed Trigger – Delayed by time, events, or events and time.

Time Delay Range – 16 ns to 250 s.

Events Delay Range – 1 to 9,999,999 events.

External Rear Input – ≥1.5 kW: Max input voltage is ±20 V (DC + peak AC).

Trigger Types

EDGE (Main and Delayed) –

Conventional level-driven trigger. Positive or negative slope on any channel or rear panel auxiliary input. Coupling selections: DC, AC, noise reject, HF reject, LF reject.

LOGIC (Main) –

PATTERN: Specifies a logical combination (AND, OR, NAND, NOR) of the four input channels (high, low, don't care). Trigger when pattern stays true or false for a specified time.

STATE: Any logical pattern of channels 1, 2, and 3 (AUX1 on 2-CH products) plus a clock edge on channel 4 (AUX2 on 2-CH products). Triggerable on rising or falling clock edge.

SETUP/HOLD: Trigger on violations of both setup time and hold time between clock and data which are on two input channels.

Digital Phosphor Oscilloscopes

► TDS700D

PULSE (Main) –

GLITCH: Trigger on or reject glitches of positive, negative, or either polarity. Minimum glitch width is 1.0 ns (typical) 2 ns (warranted) with 200 ps resolution.
RUNT: Trigger on a pulse that crosses one threshold but fails to cross a second threshold before crossing the first again.

WIDTH: Trigger on width of positive or negative pulse either within or out of selectable time limits (1 ns to 1 s).

SLEW RATE: Trigger on pulse edge rates that are either faster or slower than a set rate. Edges can be rising, falling or either.

TIMEOUT: Trigger on an event which remains high, low, or either, for a specified time period, selectable from 1 ns to 1 s, with 200 ps resolution.

COMM (Optional) –

AMI: Trigger on standard communications signals (including DS1, DS1A, DS1C, DS2, DS3, E1, E2, E3, STS-1 or a custom bit rate). Select between “isolated ones” (positive or negative) and eye diagrams.

CMI: Trigger on standard communications signals (including STS-3, STM1E, DS4NA, E4 or a custom bit rate). Select between positive or negative one pulses, zero pulses and eye diagrams.

NRZ: Trigger on standard communications signals (including OC1/STM0, OC3/STM1, OC12/STM4, E5, FC133, FC266, FC531, FC1063, FDDI HALT, 143 Mb/s serial digital composite video, 270 Mb/s serial digital component video or a custom bit rate). Select between an eye diagram, rising or falling edges or any of eight 3-bit serial patterns.

VIDEO (Optional) –

Trigger on a particular line of individual, odd/even, or all fields. Trigger on a specific pixel of a line by using the video trigger with delay by events. Choose positive or negative horizontal sync polarity.

525/NTSC: Choose monochrome or color (studio-quality NTSC) sync formats.

625/PAL: Choose color or monochrome (studio-quality PAL) sync formats.

HDTV: Choose from 1125/60, 1050/60, 1250/50 and 787.5/60 HDTV formats.

Measurement System

Automatic Waveform Measurements –

Period, frequency, + width, – width, rise time, fall time, + duty cycle, – duty cycle, delay, phase, burst width, high, low, max. min, peak to peak, amplitude, + overshoot, – overshoot, mean, cycle mean, RMS, cycle RMS, area, cycle area, extinction ratio (ratio, dB, %) and mean optical power. Continuous update of up to four measurements on any combination of waveforms.

Measurement Statistics – Display minimum and maximum or mean and standard deviation on any displayed single-waveform measurements.

Thresholds – Settable in percentage or voltage.

Gating – Any region of the waveform may be isolated for measurement using vertical bars.

Snapshot – Performs all measurements on any one waveform showing results from one instant in time.

Cursor Measurements – Absolute, Delta: Volts, Time, Frequency and NTSC IRE and line number (with video trigger option).

Cursor Types – Horizontal bars (volts), vertical bars (time): operated independently or in tracking mode.

Waveform Processing

Waveform Functions – Sin(x)/x or linear interpolation, Average, Envelope.

Advanced Waveform Functions – FFT, Integration, Differentiation.

Arithmetic Operators – Add, Subtract, Multiply, Divide, Invert.

Autoset – Single-button, automatic setup on selected input signal for vertical, horizontal and trigger systems. Also automatically normalizes signals to standard masks when used with the mask testing option.

Waveform Limit Testing – Compares incoming or math waveform to a reference waveform's upper and lower limits.

Waveform Histograms – Both vertical and horizontal histograms, with periodically updated measurements, allow statistical distributions to be analyzed over any region of the signal. For histograms on DPO acquisitions, both live and stored, the specified region can be repositioned and will update to reflect the underlying 3 dimensional data base, in both YT and XY modes (32 bits in shallow mode, 64 bits in deep mode).

Mask Testing (Optional) – In addition to the standard communication masks in the instrument, the masks can be edited on the screen. Together with automatic waveform scaling, the mask tests give rapid verification of a digital bit stream's conformance to pulse templates and eye pattern masks. For optical conformance testing, the internal Fibre Channel and SONET/SDH optical reference receiver filters provide convenient test setup which is compliant to industry standards.

Zoom Characteristics

The zoom feature allows waveforms to be expanded or compressed in both vertical and horizontal axes. Allows precise comparison and study of fine waveform detail without affecting ongoing acquisitions. When used with Hi-res or Average acquisition modes, Zoom provides an effective vertical dynamic range or 1000 divisions or 100 screens. Zoom features not available on DPO operations.

Dual Window Zoom – Dual graticules simultaneously show selected and zoomed waveforms. Up to two zoom boxes show areas on the selected trace that are being magnified, and the two magnified areas can be overlapped for quick comparison. Color of zoomed trace matches selected trace.

Display Characteristics

Waveform Style – Dots, vectors, variable persistence from 32 ms to 10 s, infinite persistence and intensified samples.

Color – Standard palettes and user-definable color for waveforms, text, graticules and cursors. Measurement text and cursor colors matched to waveform. Waveform collision areas highlighted with different color. Statistical waveform distribution shown with color grading through variable persistence.

Color Grading – With variable persistence selected, historical timing information is represented by temperature or spectral color scheme providing “z-axis” information about rapidly-changing waveforms.

Graticules – Full, grid, cross-hair, frame, NTSC and PAL (with video trigger option).

Format – YT and XY (and XYZ and dual XY in DPO operation).

Type – 7 in. diagonal, NuColor™ liquid crystal full color shutter display, 256 color levels.

Resolution – 640 horizontal by 480 vertical displayed pixels (VGA).

Computer Interface

GPIB (IEEE-488.2) Programmability – Full talk/listen modes. Control of all modes, settings, and measurements.

Hardcopy

Printer – Phaser 740N/740P, HP Thinkjet, Deskjet, Laserjet, Epson, Interleaf, PostScript, TIFF, PCX, BMP, DPU411/412, RLE.

Plotter – HPGL.

Data – MathCad, spreadsheet formats.

Interface – GPIB standard.

Hardcopy Interface – Centronics and RS-232 (talk only).

Storage

Non-volatile Waveform Storage – 4 full 50 K records (Opt. 1M or 2M: 4 full 130 K records, 2 full 250 K records, or 1 compressed 500 K record) (TDS794D, TDS784D, TDS754D); 2 full 50 K records (Opt. 1M or 2M: 2 full 130 K records or 1 full 250 K record) (TDS724D).

Non-volatile Storage for Setups – 10 front panel setups.

Floppy Disk Drive – Store reference waveforms, setups, and image files on 3.5 in. 1.44 MB or 720 K MS DOS-format floppy disk.

Iomega Zip and Zip Plus Drive Compatible – Compatible for waveform and front panel setup file transfer to Iomega Zip and Zip Plus Drives.

Power Requirements

Line Voltage Range – 100 to 240 V_{RMS}.

Line Frequency – 45 to 440 Hz.

Power Consumption – 350 W max.

Environmental and Safety

Temperature –

Operating: +4 to +50°C (floppy not used), +10 to +50°C (floppy in use).

Nonoperating: –22 to +60°C.

Humidity –

Operating: To 80% RH at ≤32°C. Derates to 30% RH at +45°C.

Nonoperating: To 90% RH at ≤40°C. Derates to 30% RH at +60°C.

Altitude –

Operating: 15,000 ft. (hard disk not used), 10,000 ft. (hard disk in use).

Nonoperating: 40,000 ft.

Electromagnetic Compatibility – 89/336/EEC.

Safety – UL3111-1, CSA1010.1, EN61010-1, IEC61010-1.

Physical Characteristics

Dimensions	mm	in.
Height with feet	193	7.6
Height without feet	178	7
Width with handle	445	17.5
Depth with front cover installed	434	17.1
Weight	kg	lbs.
Net ≈	14.1	31
Shipping Weight ≈	25.4	56

▶ **Ordering Information**

TDS794D

Digital Phosphor Oscilloscope.

TDS784D

Digital Phosphor Oscilloscope.

TDS754D

Digital Phosphor Oscilloscope.

TDS724D

Digital Phosphor Oscilloscope.

Included Accessories

Probes – 4 each P6139A passive probes (TDS754D), 2 each P6139A (TDS724D).

Documentation – Quick Reference in 9 languages (020-2235-00), User Manual (071-0130-00), Technical Reference (071-0135-00), Programmer's Manual (063-3120-00) in MS Help format on floppy disk, and ANSI, NCSL Z 540-1-1994 (ISO Guide 25) calibration certificate.

Accessories – Front Cover (200-3696-01), US power cord (161-0230-01), and accessory pouch (016-1268-00; TDS794D, TDS784D, TDS754D, TDS724D).

Instrument Options

Opt. 05 – Add video trigger (NTSC, PAL, HDTV, FlexFormat™). (Not available on the TDS794D).

Opt. 1M – Add 130 K/channel memory length (500 K max on TDS794D, TDS784D, TDS754D) 250 K max (TDS724D).

Opt. 2M – Add 2 M/channel memory length (8 M max on TDS794D, TDS784D, TDS754D; 4 M max on TDS724D). Includes internal hard disk drive.

Communication Signal Analyzer Options

Opt. 2C – Communication Signal Analyzer; includes comm triggers and communication mask testing.

Opt. 3C – Short-wavelength (Fibre Channel FC133, FC266, FC513, FC1063) Optical Reference Receiver; includes P6701B and system calibration (Not Available on the TDS794D).

Opt. 4C – Long-wavelength (SONET/SDH OC1/STM0, OC3/STM1, OC12/STM4) Optical Reference Receiver; includes P6703B and system calibration (Not Available on the TDS794D).

Instrument Probe Options

Opt. 31 (TDS794D only) – Add 1 each P6339A buffered passive probe.

Opt. 33 (TDS794D, TDS784D only) – Add 1 each P6158 low capacitance probe.

Opt. 34 – Add 1 each P6247 differential probe.

Opt. 35 (TDS754D, TDS724D only) – Add 1 each P6243 active probe.

Opt. 36 (TDS784D, TDS754D, TDS724D only) – Add 1 each P6139A passive probe. (4 standard on TDS754D, 2 standard on TDS724D).

Opt. 37 (TDS784D only) – Add 1 each P6245 active probe.

Opt. 38 (TDS794D only) – Add 1 each P6249 4 GHz active probe.

Opt. 39 (TDS794D only) – Add 1 each P6248 1.7 GHz differential probe.

Opt. 2D (TDS724D only) – Delete 2 each standard probes.

Opt. 4D (TDS754D only) – Delete 4 each standard probes.

See next page for additional ordering information.

Digital Phosphor Oscilloscopes

▶ TDS700D

▶ Ordering Information Continued

Instrument Applications Measurement Software

Note: Requires Option HD or 2M.

TDSPRT1 – Printing Utility.

TDSDDM1 – Disk drive measurement package.

TDSPWR1 – Power measurement package.

TDSJIT1V2 – Jitter and timing analysis package.

TDSCEM1 – Communications eye-diagram measurement package.

TDSCPM1 – Communications pulse measurement package.

WSTRO – WaveStar™ software for Oscilloscopes, Windows 95/98/NT application for waveform capture, analysis, documentation and control from your PC.

WSTROU – Upgrade from WSTR31 to WSTRO.

WSTR31U – WaveStar™ software for Windows 3.1.

WSTR31U – Upgrade from DocuWave® software to WSTR31.

LVWIN95 – LabVIEW® for Windows 95.

LVWCVI95 – LabWindows/CVI for Windows 95.

S3FT400 – WaveWriter™ AWG and waveform creation software.

International Power Plugs

Opt. A1 – European power cord (220 V, 50 Hz).

Opt. A2 – UK power cord (240 V, 50 Hz).

Opt. A3 – Australian power cord (240 V, 50 Hz).

Opt. A4 – North American power cord (240 V, 60 Hz).

Opt. A5 – Swiss power cord (220 V, 50 Hz).

Optional Accessories

Opt. 1K – Add K420 scope cart.

Opt. 1R – Rackmount kit.

Opt. L1 – Substitute French user manual for English user manual.

Opt. L3 – Substitute German user manual for English user manual.

Opt. L5 – Substitute Japanese user manual for English user manual.

Opt. L9 – Substitute Korean user manual for English user manual.

Recommended Probes

ADA400A – Differential Preamplifier.

AM503S – DC/AC Current Measurement System.

AFTDS – Electrical communication differential signal adapter.

AMT75 – 1 GHz electrical communication 75 Ω adapter.

P5100 – 2.5 kV High-voltage probe.

P5205 – 1.3 kV High-voltage 100 MHz differential probe.

P5210 – 5.6 kV High-voltage 50 MHz differential probe.

P6139A – 500 MHz passive 10X voltage probe.

P6205 – 750 MHz active voltage probe.

P6243 – 1 GHz active voltage probe.

P6245 – 1.5 GHz active voltage probe.

P6249 – 4 GHz active voltage probe.

P6158 – 3 GHz low capacitance voltage probe.

P6339A – 500 MHz buffered passive voltage probe (TDS794D only).

P6246 – 400 MHz differential probe.

P6247 – 1 GHz differential probe.

P6248 – 1.7 GHz differential probe.

P6563A – SMD passive voltage probes.

P6701B – Short-wavelength (500-950 nm) optical-to-electrical converter.

P6703B – Long-wavelength (1100-1700 nm) optical-to-electrical converter.

P6723 – Optical logic probe (1310/1550 nm).

TCP202 – DC to 50 MHz current probe.

Recommended Accessories

Service Manual – Order 071-0136-00.

GPIB – LAN Adapter – Order AD007.

Transit Case – Order 016-1135-00.

Scope Cart – Order K420.

Measurement Service Options

Opt. C3 – Three years of Calibration Services.

Opt. D1 – Cal Data Report.

Opt. D3 – Test Data (requires Opt. C3).

Contact Tektronix:

ASEAN Countries (65) 356-3900

Australia & New Zealand 61 (2) 9888-0100

Austria, Central Eastern Europe,

Greece, Turkey, Malta & Cyprus +43 2236 8092 0

Belgium +32 (2) 715 89 70

Brazil and South America 55 (11) 3741-8360

Canada 1 (800) 661-5625

Denmark +45 (44) 850 700

Finland +358 (9) 4783 400

France & North Africa +33 1 69 86 81 81

Germany +49 (221) 94 77 400

Hong Kong (852) 2585-6688

India (91) 80-2275577

Italy +39 (2) 25086 501

Japan (Sony/Tektronix Corporation) 81 (3) 3448-3111

Mexico, Central America, & Caribbean 52 (5) 666-6333

The Netherlands +31 23 56 95555

Norway +47 22 07 07 00

People's Republic of China 86 (10) 6235 1230

Poland (48) 22 521 5340

Republic of Korea 82 (2) 528-5299

South Africa (27 11) 651-5222

Spain & Portugal +34 91 372 6000

Sweden +46 8 477 65 00

Switzerland +41 (41) 729 36 40


Taiwan 886 (2) 2722-9622

United Kingdom & Eire +44 (0)1344 392000

USA 1 (800) 426-2200

For other areas, contact: Tektronix, Inc.
1 (503) 627-1924

For the most up-to-date product information visit our web site at www.tektronix.com



Copyright © 2001, Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

01/01 HB/PG

55W-11336-4